

Corona-PRO





Round LED Recessed dark-light downlight. Adjustable 30deg tilt.

Product code	DT. 6624 (add suffix see below)
Construction	Die Cast Aluminium
Colour finish	Suffix: WHITE -11 RAL on request
Light source	a) 9w LED 40 deg (750 lms) 200 mA 45v b) 11w LED 40 deg (975 lms) 250 mA 44v c) (DIM TO WARM OPTION) d) GU10 7w LED 36 deg (560 lms) 240v SORAA (Please contact us for alternative sources)
Colour temp & CRI	Suffix: 2700K / 3000K / 4000K; (Dim to warm option available) Suffix: CRI 83 or 90+
Macadam	<3
Driver option	Suffix: Phase dimming DALI 0-10V
Optional accessories	Honeycomb Elongating lens / etched glass, Firehood Suffix AW - White internal barrel
Dimensions	h85 x 70
Cut out dimension (mm)	61
Special notes	Matching IP54 version available. Flush plaster frame available to order. Remote 3-hour emergency pack available on request.



Trimless flush frame on request

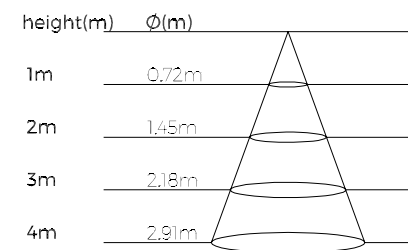

Why use this?

Slim discreet anti-glare look, directional. Excellent angle of tilt. Suitable for all general downlight applications. Tuneable dim-to-warm available.

