



INSTALLATION OPTIONS

SCREW DIRECT TO SURFACE,  
REQUIRES 20MM CAVITY BEHIND FOR  
CABLE TERMINATION. SCREW  
CENTRES FIT A FLUSH BESA BOX (NOT  
SUPPLIED)

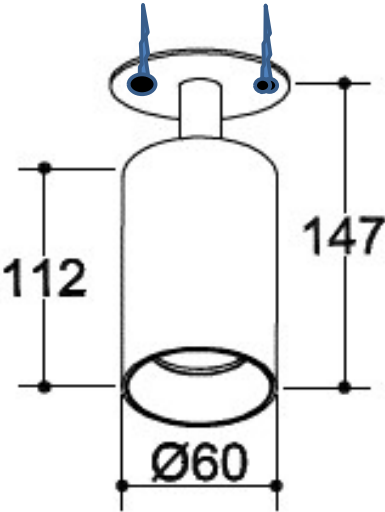


DRIVER BUILT-IN

FIXING CENTRES FIT STANDARD SURFACE  
BESA BOX (NOT SUPPLIED)


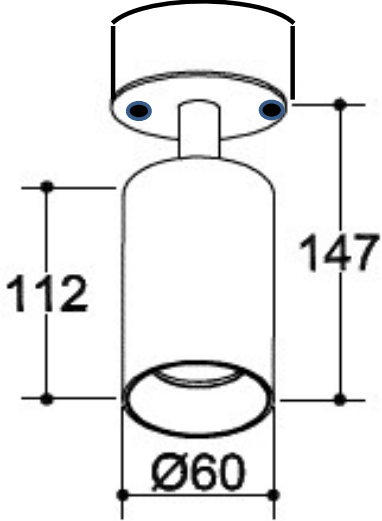


DRIVER BUILT-IN

SUPPLIED WITH SURFACE PLATE,  
ALLOWS FOR CONNECTIONS WITHIN

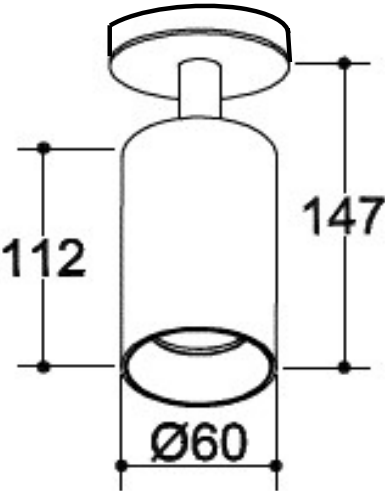

DRIVER BUILT-IN

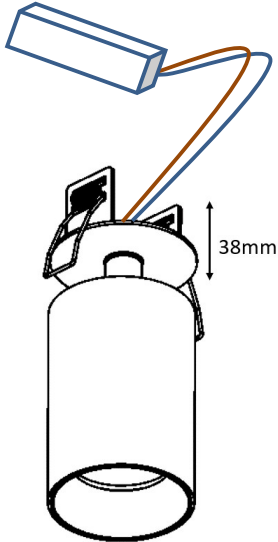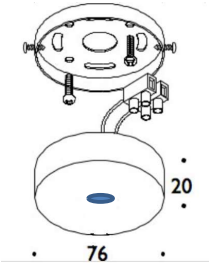

RECESSED CEILING PLATE;  
DRIVER REMOTE