





In-ground uplight fixed with optional anti-glare shield.


Product code	DT. DL3091 (add suffix see below)
Construction	Die-cast aluminium, Stainless steel 316 (marine grade)
Colour finish	Suffix: Brushed stainless steel RAL on request
Light source	Suffix: a) 3w LED 12deg (200lms) 700mA 4.5v DC b) 3w LED 24deg (225lms) 700mA 4.5v DC (Please contact us for alternative sources)
Colour temp & CRI	Suffix: 2700K / 3000K Suffix: CRI 90
Macadam	<3
Driver option	Suffix: Phase dimming DALI 0-10V
Optional Accessories	Anti-glare 'half shield' Etched glass Recess tube 75mm long
Dimensions	h40 x 50
Cut out dimension (mm)	44
Special Notes	Requires remote IP rated driver. Order separately. Wire-in-series.



Supplied with recessing sleeve

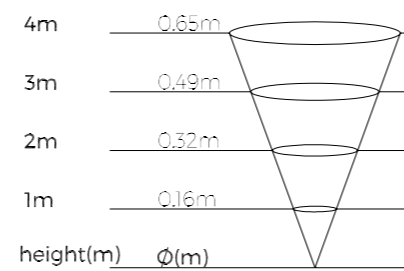

Shown with optional 'half shield' anti-glare

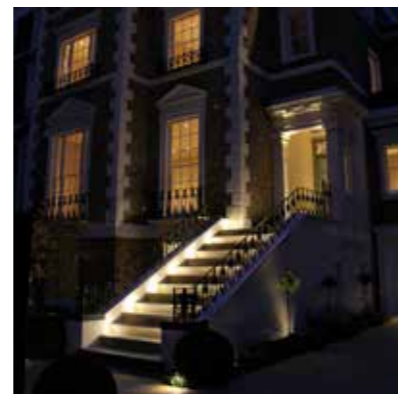

Why use this?

Dimmable, IP rated. Smallest dimensions, discreet with medium or narrow beam. Also great for step washing.