

Corona-pro Directional

DT.6624

CE

IP  
20

CRI>90

CRI>95

<sup>3</sup>  
SDCM

## Description

Round trim recessed down-light dimmable. Adjustable ) 30° deg tilt, 350° rotation. IP20  
Compact dimensions; Highest colour rendering.

OPTIONAL Fire-rated EN1363-1 :2020 Supplied with remote dimming driver

## Materials

Aluminium body, internal components

## Colour finish

WHITE RAL9003, custom RAL to order

**Dimensions (mm)** 85-108 x 70 dia. cut-out 61dia.

**Weight (KG)** 0.5

## Light Source


-9w LED (825 Lms nom.) 200 mA 45v

-11w LED 40 deg (1050 Lms nom.) 250 mA 44v

-DIM TO WARM OPTION AVAILABLE

-GU10 7w LED 36 deg (580 Lms nom.) 240v


Warm-Dim/2700K / 3000K / 4000K

**Dimming:** Phase (remote), 0-10v & DALI. Casambi  allows dimming control of each fixture


**Special note** OPTIONAL Fire-rated EN1363-1 :2020 Supplied with remote dimming driver. Details p.2




### LED module

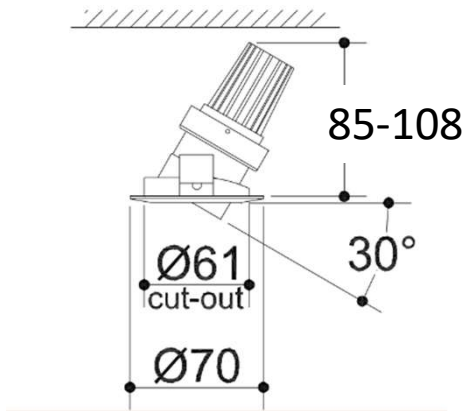

### GU10

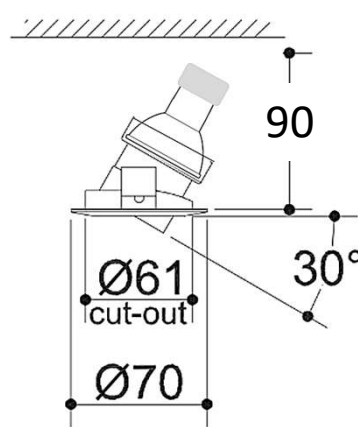


### IP54

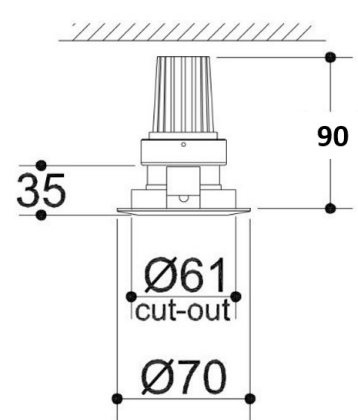

### Accessories available to order

- Softening lens
- Honeycomb lens
- Flush trimless frame
- Fire-rated EN1363-1:2020 glass accessory

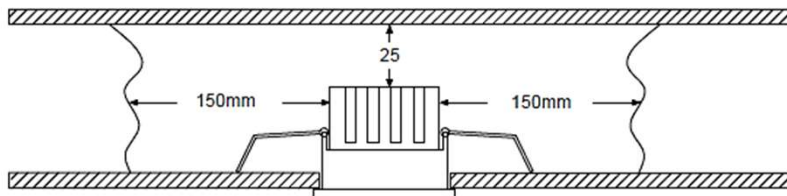

If product is marked as 'Fire-rated it is tested to EN1363-1:2020

