

Cortes 48v Code : DT. T410

CE IP20 CRI>90 <sup>3</sup>SDCM

## Description

48v DC DALI addressable track downlight, dimnable driver inside. High-output, Contemporary look, suitable for all lighting applications.

**Materials** Die Cast Aluminium


**Colour finish** BLACK RAL9017, custom RAL to order

**Dimensions (mm)** 44 x 23 x L (see below) **Weight (KG)** 0.2 – 0.5

## Light Source

Option A. 12w LED (950 lms. nom.)	48v 24° 36°	UGR16	L220mm
Option B. 24w LED (1700 lms. nom.)	48v 24° 36°	UGR16	L436mm
Option C. 36w LED (2400 lms. nom.)	48v 24° 36°	UGR16	L652mm

**CCT available** 2700K / 3000K / 4000K




**Dimming** 0-10v or DALI, Casambi  dimming control (remote)

## Special Notes

Suitable for both surface track and deep recessed, see.p.2



# Detail | lighting Cortes 48v DT. T410

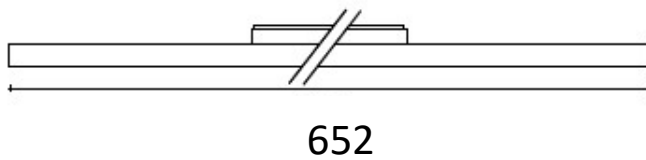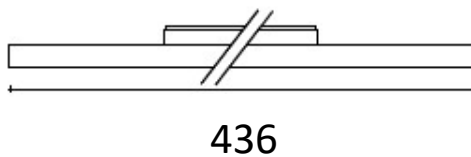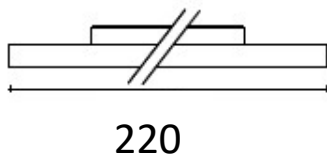

Alternative louvre insert available

N.B consider any loading restrictions of the track system

<http://www.detaillighting.co.uk/cortes-48v-system/p/184>

t. 01908 613256  
[sales@detaillighting.co.uk](mailto:sales@detaillighting.co.uk)  
[www.detaillighting.co.uk](http://www.detaillighting.co.uk)

We reserve the right to change or withdraw specifications without prior notice E.&.O.E