

Flow-it TL45

CE IP20 CRI>95 ²SDCM

Description

Round LED track spotlight dimmable. Adjustable 90 deg tilt, 320 deg rotation.

Compact dimensions; Integral driver, Highest colour rendering. Wall-washing attachment available

Materials

Aluminium body, internal components


Colour finish

BLACK RAL9005, WHITE RAL9003, custom RAL to order

Dimensions (mm) 109 X 93 DIA **Weight (KG)** 0.4

Light Source

20w LED (1650lm) 15° 20° 36° 48° 60°
2700K / 3000K / 4000K


Dimming: Phase (inside), 0-10v & DALI. Casambi  allows dimming control of each fixture





Accessories available

- Honeycomb filter
- Wall-wash kick refl'r
- Elongating lens

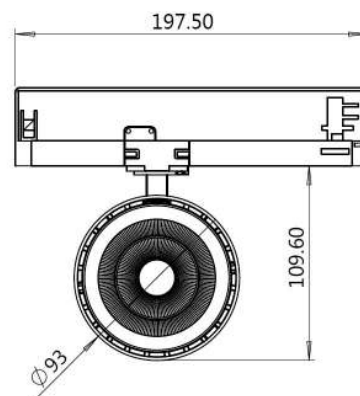

Room height (h)	Beam dia. (lit areaX)	Distance from wall (Y)
2500mm	600mm	750mm
3200mm	650mm	900mm
4000mm	900mm	1400mm

Dimming recommended to achieve correct lux levels
(15° LED example; above data for guidance only)

Room height (h)	Beam dia. (lit areaX)	Distance from wall (Y)
2500mm	1100mm	900mm
3200mm	1150mm	750mm
4000mm	1800mm	1850mm

Dimming recommended to achieve correct lux levels
(36° LED example; above data for guidance only)

3-circ track 1m,2m,3m



Ceiling bracket



Power feeder



Power joiner



Concealed Power joiner



Fixed 'L' power joiner



Adjustable power joiner



Fixed 'T' power joiner



Fixed 'X' power joiner



Suspension 1.5m

220-250V single-phase mains: 16A overall load, corresponding to 3500/4000 VA over the three circuits.