

Spreader

Code : DT.BS3064

CE IP65 CRI>90 ³SDCM

Description

Square surface mounted LED washer. Adjustable 90 deg tilt, dimmable (remote driver). IP65 rated. Supplied with anti-glare cowl, fixing spike & pre-wired outdoor flex.

Materials

Die-cast aluminium,

Colour finish

Black

Dims (mm) 120 x 35 x 60 (post height 180 above ground)

Weight (KG) 1.5

Light Source

Option A. Osram SSL150 13w LED (980 lms) DC24V 30°x,60° asymmetric



CCT available 3000K

Dimming: Mains, DALI, Casambi  allows dimming control of each fixture (REMOTE DRIVERS)

Special Notes: IP65 enclosure required for outdoor drivers



Spreader

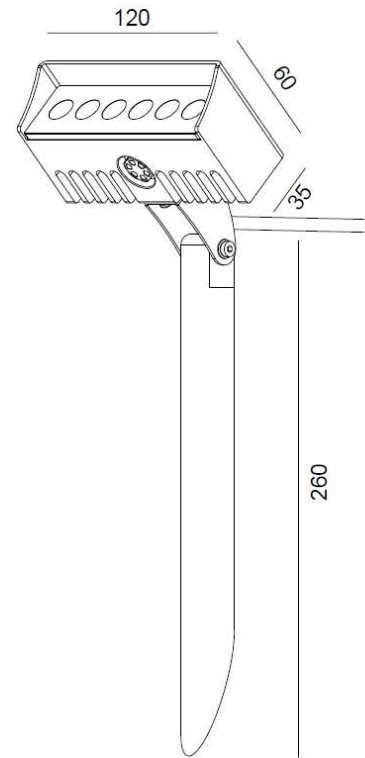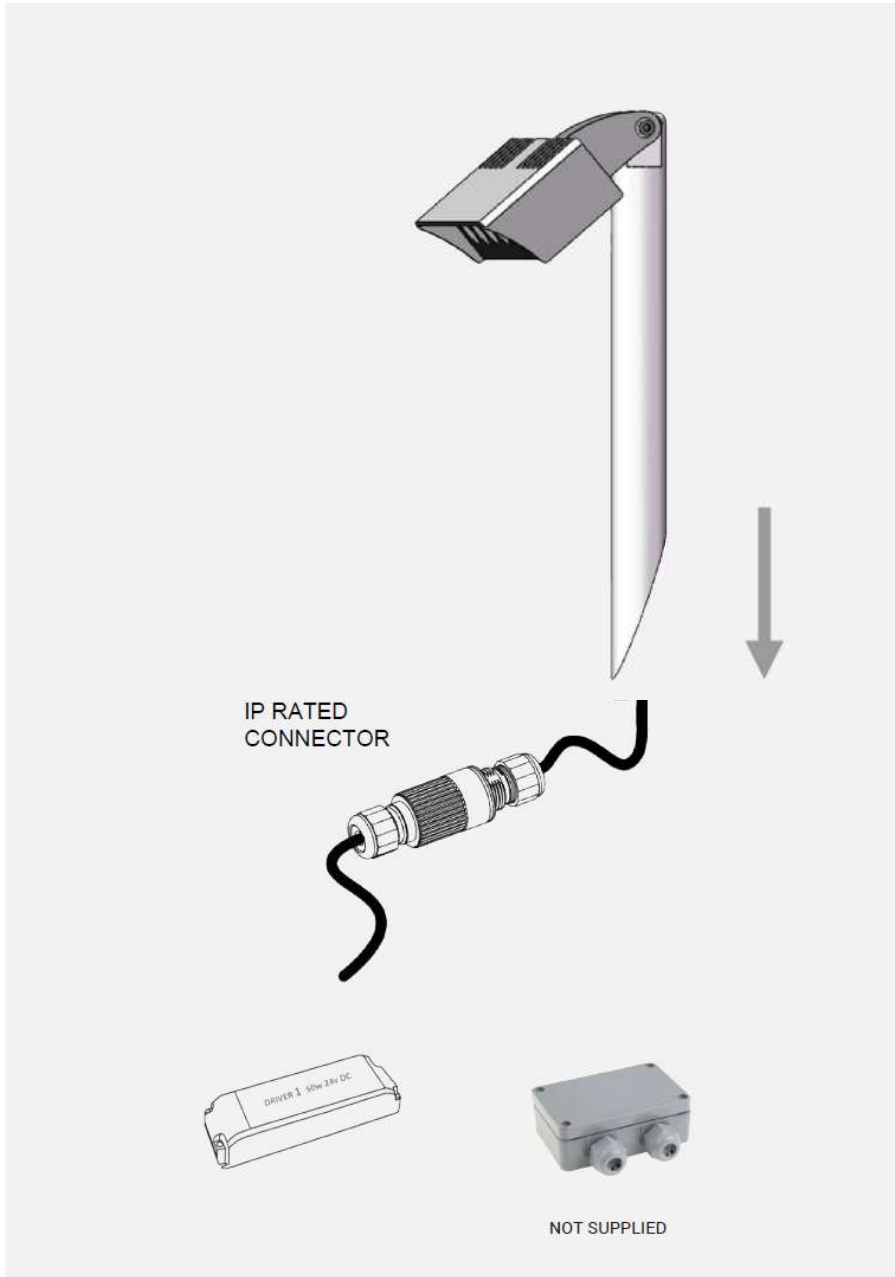

Supplied with ground spike

Accessories available to order
-wall mounting bracket

REDUCE CABLE SIZE IN ORDER TO MAKE SECURE CONNECTION

WARNINGS - all enclosures and fittings for external lights must be at least IP65