

Steve

Code : DT. Steve 727611

CE  CRI>90 ³SDCM

Description

Surface ground fixture, directional 25 °, supplied with honeycomb. (Dimmable on request), IP rated. Suitable for drive-way and building lighting, (integral driver).

Materials

Zintec treated steel, Die cast aluminium, clear glass, PMMA

Colour finish

Anthracite finish, RAL 7016. Other colours on request

Cut-out (mm) 5 body styles; refer to p.2

Weight (KG) 2 - 5

Light Source

Option A. 6w 15° (400 lms) 240v

Option B. 6w 24° (400 lms) 240v

Option C. 20w LED 15 ° (1700lms) 240v

Option D. IP67 linear 900lms/m 24v DC

CCT available 3000K / 4000K


Dimming: On / off (dimming by request) or Casambi  allows control of each fixture

Special Notes:


240v fitting (includes integral on / off driver). Dimming options by request

Optional spike or bolt fixings




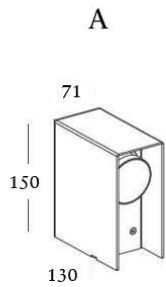


6w spot integral driv

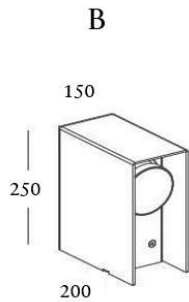



20w spot integral driver

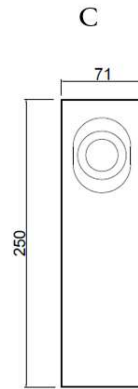

6w spot integral driver

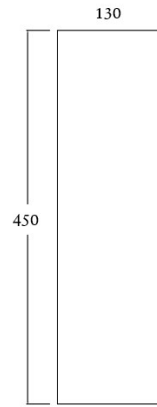


6w spot integral driver & 8w IP67 linear

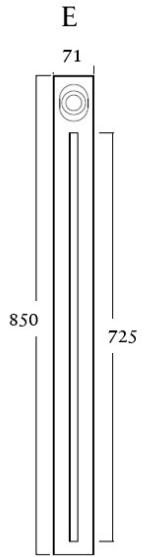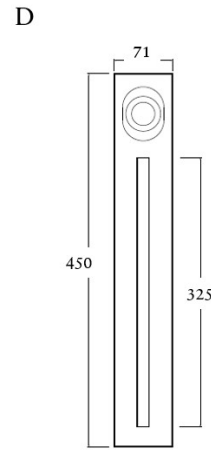

6w spot integral driver & 11w IP67 linear



REDUCE CABLE SIZE IN ORDER TO MAKE
SECURE CONNECTION



WARNINGS - all enclosures and fittings for external lights must be at least IP65 - allow adequate drainage around fittings.

Accessories available to order

- Soft landscape Spike
- bolt-down fixings