

WAITE - Exterior

Product Code DT. P1877B (add suffix see below)

DESCRIPTION / Ground - surface mounted LED post . Fixed, dimmable. IP rated. (remote driver)
WHY USE THIS: Classic out-door ground post, soft spread of light glare free. Suitable for general landscape lighting,.



IP65 **CE** **LED** IEE : A+ EN 60598.

Dimensions (mm)
h554 x 25 x 164

Cut-out (mm)
N/A



material light fixture Aluminium body and plastic spike

colours & finish/ (suffix) Bronze or - RAL xxxx

light source & voltage options
(PLEASE CONTACT US FOR ALTERNATIVE SOURCES)
a) 5W LED 160 deg (200 lms)
b)
c)
d)

colour temperature /(suffix) **2700K / 3000K / 4000K**
CRI (colour render) /(suffix) >80
MacAdam 3

Controls options /(suffix) phase dimming
DALI
0-10V



Optional Accessories

AV. Weight (kg) 2

Emergency Available? No

Special Notes Requires remote IP rated driver (not supplied). LED module included. Supplied with protected lead and spike.

technical performance

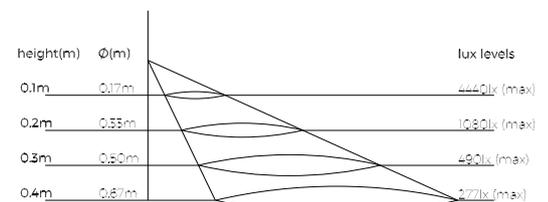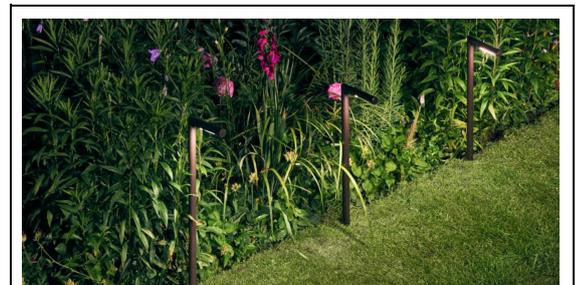

contact Detail lighting for all .ies files






TECH NOTES; Check the luminaires power requirements carefully as it is not possible to determine this from the cable type, thickness and colour. If drivers are required they are sold separately and are not pre wired. Connecting low voltage lights to mains power will result in irreparable damage to the fitting.

WARNINGS - all enclosures and connections for external lights must be at least IP65 - allow adequate drainage around fittings.


OUTDOOR FIXTURES REQUIRE CORRECT IP CONNECTION

WARNING: Check fitting type to ascertain correct wiring type (series or parallel) incorrect wiring will damage the fittings. Please note if disconnecting power to the driver then wait up to 30 mins for retained current in the driver to discharge. Also observe that driver should not be powered unless all the LEDs are fitted correctly in a circuit.

1 Turn off power!






2

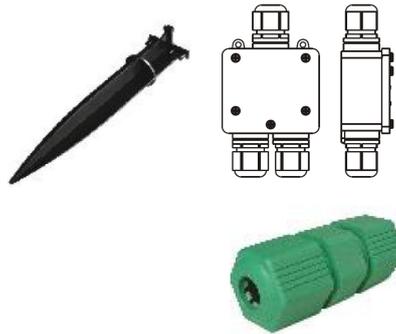

1) Always ensure mains power is isolated prior to working on any lighting installation. **REDUCE CABLE SIZE IN ORDER TO MAKE SECURE CONNECTION**

3

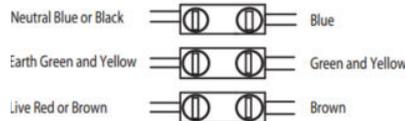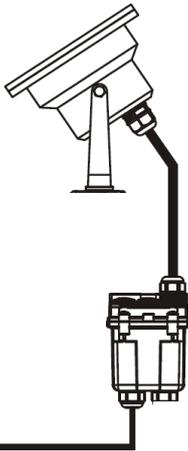

2) Site fixing spike; If fitting is being installed in external area ensure there is adequate drainage. Prepare incoming cable with appropriate water-proof connector

OUTDOOR FIXTURES REQUIRE CORRECT IP CONNECTION. CONFIRM SERIES OR PARALLEL WIRING?

3) **REDUCE CABLE SIZE IN ORDER TO MAKE SECURE CONNECTION.** connections for external lights must be at least IP65